

## EMS 100 µs-switch

### SIMULATION OF MICRO CUT-OFFS AND DISCHARGE OF LOAD CURRENTS IN AUTOMOTIVE SUPPLY NETWORKS



EMS 100 µs-switch

- ✓ Extremely fast electronic switch for signal and power lines
- ✓ Very short voltage interruptions
- ✓ Fast rise and fall time
- ✓ Trigger input and output
- ✓ Signal line switch or relay
- ✓ Switch supply line or ground line independently
- ✓ Device control via webinterface and interface commands
- ✓ Test and evaluation software available

*The relating standards\*:*

*ISO 7637-2*  
*ISO 7637-3*  
*ISO 16750-2*  
*ISO 21848*  
*LV124*  
*VDA320 (LV148)*  
*BMW GS 95002*  
*BMW GS 95002-2*  
*BMW GS 95003-2*  
*BMW GS 95024-2-2*  
*BMW GS 95026*  
*FCA CS.00054*  
*Fiat 9.90111-01*  
*Ford FMC1278*  
*GMW 3097*  
*GMW 3172*  
*JLR EMC-CSv1.0A4*  
*MAN M 3285*  
*MBN LV 124-1*  
*MBN 10567*  
*Mitsubishi ES-X82114*  
*Mitsubishi EX-X82115*  
*Nissan 28401NDS02*  
*PSA B21 7110*  
*Renault 36-00-808/-M,N*  
*SAE J 1113-11*  
*Volvo 31822854*  
*Volvo 31850329*  
*VW 80000*  
*VW 82148*  
*VW TL 81000*  
*Magnetic field test*

*\* The EMS 100 µs-switch can be used for certain tests within these standards. Additional equipment might be required. For detailed information, please contact [sales@spitzenberger.de](mailto:sales@spitzenberger.de).*

FAST ELECTRONIC SWITCH  
FOR SHORT VOLTAGE INTERRUPTIONS



## Schematic overview

The  $\mu$ s-switch type EMS is a very fast electronic switch combination for testing in accordance with various automotive test standards. Originally designed for the LV124 standard, the flexibility of the EMS 100  $\mu$ s-switch extends its use to the VDA 320 (LV148) and various manufacturer specific standards. The EMS 100  $\mu$ s-switch allows to switch the supply and ground lines independently. For interruption of signal lines, the EMS 100  $\mu$ s-switch offers two extension slots for an optional signal switch module and relay module.

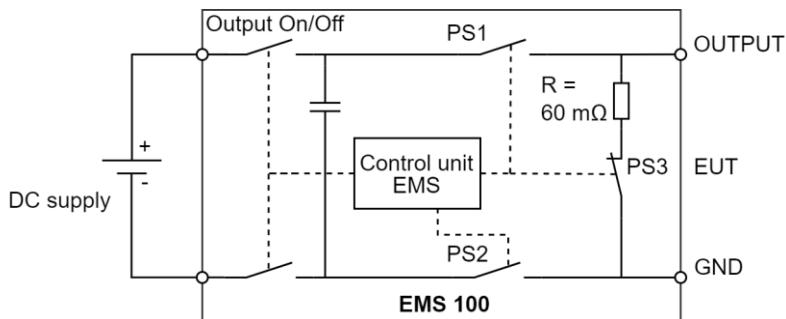


Fig. 1: EMS 100  $\mu$ s-switch schematic

The ability of generating very short voltage interruptions of 10  $\mu$ s duration requires a very fast rise and fall time of the electronic switches. The LV124 standard specifies the rise and fall time  $t_r / t_f$  as  $\leq (0.1 * t_1)$  of the desired test cycle  $t_1$  (Fig. 2).

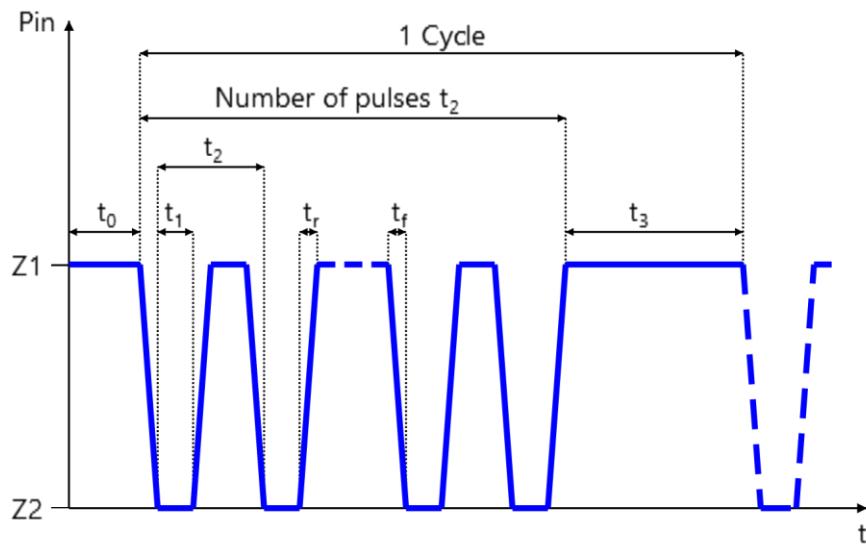


Fig. 2: LV124 E-13 pin interruption test pulse



The short-time current capability of the power switches is shown in the diagrams below.

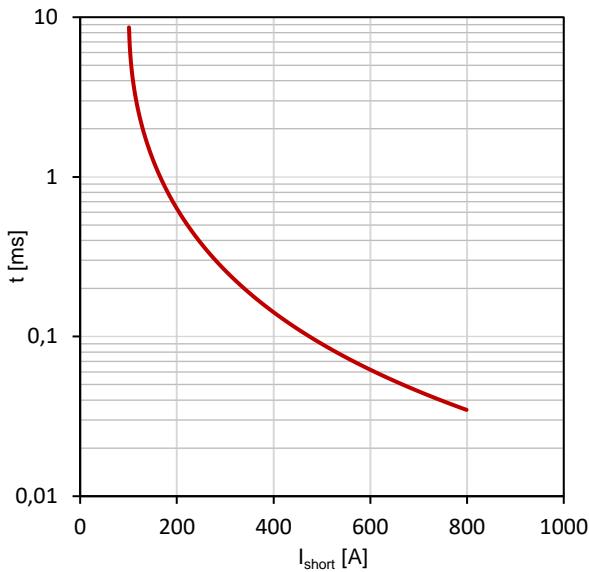


Fig. 3: Short-time current capability PS1 and PS2

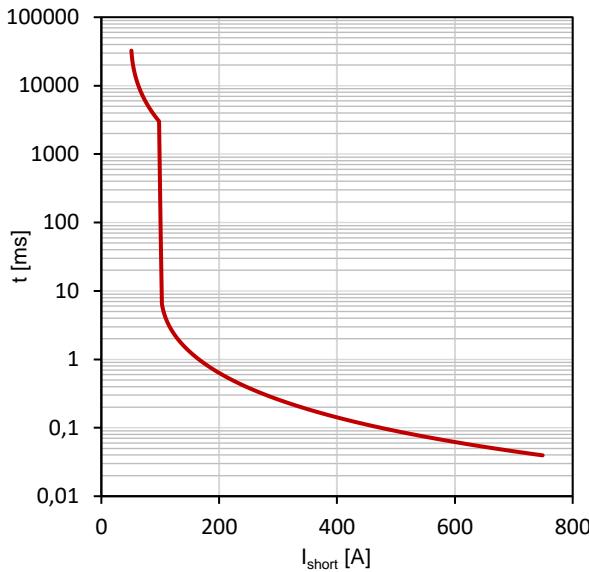


Fig. 4: Short-time current capability PS3 and R

## SOFTWARE CONTROL

### SPS TestManager

- ✓ Test and evaluation software for fully compliant emission and immunity tests
- ✓ Automated test run of various IEC and automotive standards

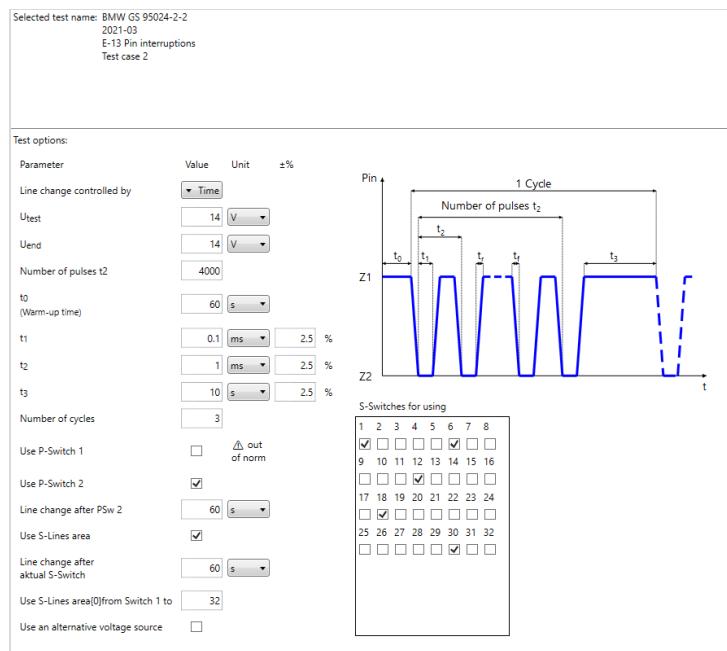


Fig. 5: SPS TestManager software



# AUTOMOTIVE SOLUTIONS

## SPS SystemControl

- ✓ Simulation and control software for arbitrary waveforms, voltage and frequency variations
- ✓ Generation of user defined sequences
- ✓ Sequence preview graph

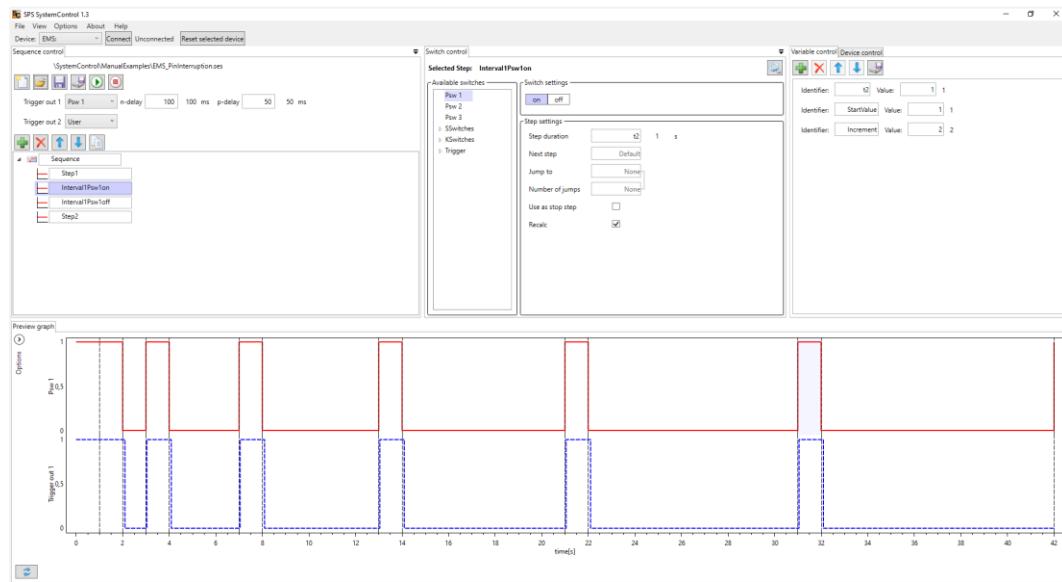


Fig. 6: SPS SystemControl software

## Command interface

- ✓ Easily integrate the device into your own software applications
- ✓ Remote control commands are based on the SCPI standard

## Webinterface


- ✓ Monitor and control the connected device via a web browser



# AUTOMOTIVE SOLUTIONS

**SPITZENBERGER**  
**PIES**

## TOUCHSCREEN USER INTERFACE

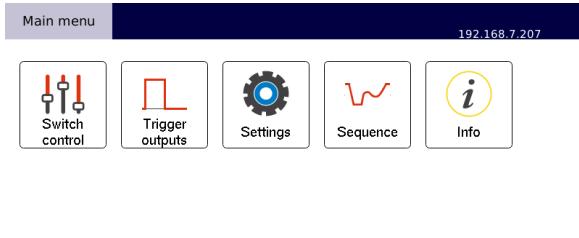

Pswitch1: ● Pswitch3: ●  
Pswitch2: ●

Fig. 7: Main menu




Pswitch1: ● Pswitch3: ●  
Pswitch2: ●

Fig. 8: P Switch control



Pswitch1: ● Pswitch3: ●  
Pswitch2: ●

Fig. 9: S Switch control

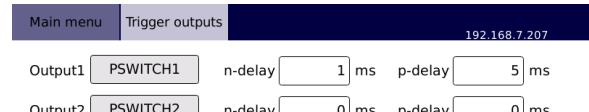

Pswitch1: ● Pswitch3: ●  
Pswitch2: ●

Fig. 10: Trigger outputs


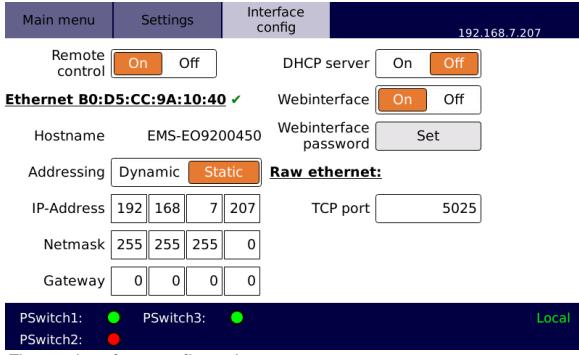


Fig. 11: Interface configuration



Pswitch1: ● Pswitch3: ●  
Pswitch2: ●

Fig. 12: Sequence menu



# AUTOMOTIVE SOLUTIONS



## TECHNICAL DATA – EMS 100

		<b>EMS 100</b>
<b>DC input voltage (max.)</b>		70 V
<b>Break down voltage</b>		> 70 V
<b>DC output current</b>	<i>continuous</i>	100 A
	<i>short-time</i>	see diagrams <a href="#">Fig. 3 and Fig. 4</a>
<b>Power switch on-state resistance</b>		approx. 10 mΩ at nominal current
<b>Rise time t<sub>r</sub> (ref. load)</b>		< 1 µs (1 Ω / 10 Ω / 100 Ω)
<b>Fall time t<sub>f</sub> (ref. load)</b>		< 1 µs (1 Ω / 10 Ω / 100 Ω)
<b>Rise time t<sub>r</sub> (ref. load)</b>		< 10 µs (1 kΩ)
<b>Fall time t<sub>f</sub> (ref. load)</b>		< 10 µs (1 kΩ)
<b>t<sub>on</sub> / t<sub>off</sub> time (min.)</b>		1 µs
<b>Extension slots for SSW/Relay</b>		2
<b>Trigger input (PS1 + PS2)</b>		+5 V ... +24 V
<b>Trigger output (switch selectable)</b>		
	<i>Trigger level</i>	+5 V (TTL level)
	<i>Release delay</i>	0 ... 100 ms
<b>Protection circuits</b>		overcurrent / short circuit / overtemperature / overvoltage
<b>Internal control unit</b>		
	<i>Display</i>	7.0" touchscreen (17.8 cm, resolution 800 x 480)
	<i>Sequencer</i>	integrated sequence: Calibration LV124 user defined sequences memory
	<i>User interface</i>	touchscreen / front panel button / incremental encoder webinterface
<b>Interface</b>		Ethernet 100 Mbit/s (HiSLIP SCPI) USB 2.0 Host
<b>Insulation resistance</b>		> 1 MΩ
<b>Peak withstand voltage</b> (max. 10 s, output to earth)		> 500 V
<b>Cooling</b>		temperature-controlled forced air cooling
<b>Ambient temperature</b>		+10 °C up to +40 °C
<b>Storage temperature</b>		-25 °C up to +60 °C
<b>Relative humidity</b>		non condensing, max. 80 % for temperature < 31 °C, decreasing linearly to 50 % at 40 °C
<b>Ingress protection</b>		IP20
<b>Power supply (±10 %, 50/60 Hz)</b>		230 V
<b>Line protection, connection</b>		2 A, Schuko
<b>Housing</b>		plug-in unit or desktop, light grey (RAL7035)
	<i>Switch approx. dimensions (H x W x D)</i>	19", 5 U 222 x 483 x 450 mm
<b>Weight (approx.)</b>		23 kg



## OPTIONS AND ACCESSORIES

<b>Options</b>	
OPT.01	IEEE488
OPT.02	RS232
<b>EMS.CAL</b>	
Resistor types	High precision non-inductive measurement resistors
1 kΩ	5 W / 1 %
100 Ω	5 W / 1 %
10 Ω	125 W / 1 %
1 Ω	125 W / 1 %
Measurement	BNC connector
approx. dimensions (H x W x D)	55 x 114 x 64 mm
<b>EMS.R2.16</b>	
Number of relays	16 per module, contact type 2C
Max. DC switching current (real load)	2 A
Max. DC switching voltage (real load)	70 V
Max. switching power (real load)	60 W
Protection	2 A fuse
<b>EMS.SSW.1.16</b>	
<b>Signal switch module 1A/16 (upgradable to 32)</b>	
Number of switches	16 per module
DC input voltage	0 ... +70 V
DC output current capability	1 A
Rise time $t_r$ (ref. load)	< 1 µs (100 Ω / 1 kΩ)
Fall time $t_f$ (ref. load)	< 1 µs (100 Ω / 1 kΩ)
Protection	1 A fuse
<b>EMS.SSW.4.8</b>	
<b>Signal switch module 4A/8 (upgradable to 16)</b>	
Number of switches	8 per module
DC input voltage	0 ... +70 V
DC output current capability	4 A
Rise time $t_r$ (ref. load)	< 1 µs (100 Ω / 1 kΩ)
Fall time $t_f$ (ref. load)	< 1 µs (100 Ω / 1 kΩ)
Protection	4 A fuse