

## LVA 1000 AMPLIFIER

### TECHNICAL DATA


LVA 1000		
<b>Nominal voltage ranges (DC)</b>	-15 V ... +20 V -15 V ... +36 V -15 V ... +54 V -15 V ... +70 V	
<b>Max. continuous current capability</b>	25 A (range depending, <a href="#">see diagrams</a> )	
<b>Max. short-time current capability</b> (up to 30 s)	35 A (range depending, <a href="#">see diagrams</a> )	
<b>Max. peak current capability</b> (up to 50 ms)	90 A	
<b>Frequency bandwidth</b>	large signal: DC ... 50 kHz (-3 dB)	
	small signal (10 %): DC ... 300 kHz (-3 dB)	
<b>Slew rate</b> (at resistive load = 10 $\Omega$ )	> 20 V/ $\mu$ s	
<b>Rise time</b> (at resistive load = 10 $\Omega$ )	$\leq 2 \mu$ s (0 ... 20 V)	
<b>Noise at output (RMS)</b>	< 20 mV (< 20 MHz)	
<b>Load regulation: 0 ... nominal load</b>	max. 0.2 %, typ. < 0.1 %	
<b>Adjustable current limitation</b>	accuracy, see current measurement unit response time < 20 $\mu$ s	
<b>Protection circuits</b>	overload / short circuit / overtemperature	
<b>Source resistance (optional)</b>	Ri programmable: 0 ... 500 m $\Omega$	
<b>Floating output</b>	max. voltage between earth and the amplifier's ground output: < 300 V (RMS)	
<b>External input</b> (optional)	Max. peak voltage	0 ... U <sub>ExtMax</sub> (U <sub>ExtMax</sub> is adjustable between $\pm 2$ V ... $\pm 25$ V)
	Input impedance	approx. 10 k $\Omega$
	Delay time	signal delay between amplifier's external input and amplifier's output < 5 $\mu$ s
<b>Internal oscillator unit</b>		
	Type	4-channel synthesiser
	Wave forms	DC, sine, square, triangle, ramp, arbitrary
	Amplitude resolution	17 Bit
	Frequency range	DC ... 1 MHz
	Frequency resolution	1 $\mu$ Hz
	Frequency accuracy	25 ppm
	Phase range	0° ... 360°
	Phase resolution	0.001°
	Memory depth	1 MSample
	Synthesiser functions	ADD, AM, FM, PM, PWM
	Sequence memory	1024 steps
<b>Internal control unit</b>		
	Display	7.0" touchscreen (17.8 cm, resolution 800 x 480)
	Sequencer	integrated sequences: amplitude pulse, frequency pulse (lin/log) user defined sequences memory
	User interface	touchscreen / front panel button / incremental encoder webinterface
	Digital I/O	8 digital DC inputs: +5 V ... +24 V 8 digital DC outputs: +5 V (internal U <sub>CC</sub> ), I <sub>L</sub> = 40 mA (external DC input U <sub>CC</sub> : +5 V ... +24 V, I <sub>L</sub> = 250 mA)

<b>Measurement</b>		
	Voltage measurement ranges (DC)	20 V / 40 V / 80 V (autoranging)
	Voltage accuracy	DC: $\pm(0.1 \% \text{ of reading} + 0.02 \% \text{ of range})$
	Current measurement ranges	12.5 A / 25 A / 50 A / 90 A
	Current accuracy	DC: $\pm(0.2 \% \text{ of reading} + 0.04 \% \text{ of range})$
<b>Monitoring unit (optional)</b>		voltage                      current
	Max. peak output	$\pm 10 \text{ V}$
	Scaling factor 'sf' (adjustable)	sf: 0.2 ... 1000                      sf: 0.1 ... 1000
	Bandwidth	300 kHz                      200 kHz
	Monitoring accuracy	$\pm(\% \text{ of reading} + \% \text{ of range} + \text{error(sf)})$
	Frequency	DC
	Voltage monitor accuracy	$0.12 + 0.02 + 2 \text{ mV} * \text{sf}$
	Current monitor accuracy	$0.22 + 0.04 + 2 \text{ mA} * \text{sf}$
	Noise of ADC measurement (RMS)	< 20 mV (DC ... 300 kHz)                      < 1.5 mA (DC ... 300 kHz)
	Noise DAC output (RMS)	< 0.2 mV (DC ... 300 kHz)
	Delay time	< 1 $\mu\text{s}$
	Output impedance	47 $\Omega$
	Isolation	earth / remaining electronics / each other
	Protection	short circuit
<b>Interface</b>		Ethernet 100 Mbit/s (HiSLIP SCPI) USB 2.0 Host
<b>Synchronisation bus (multiple devices)</b>		device synchronisation and internal communication optical fibre, LC duplex: - synchronised sequence start - parallel operation - only one ethernet connection required
<b>Insulation resistance</b>		> 1 M $\Omega$
<b>Peak withstand voltage (max. 10 s, output to earth)</b>		> 2000 V
<b>Cooling</b>		temperature-controlled forced air cooling
<b>Ambient temperature</b>		+10 °C up to +40 °C
<b>Storage temperature</b>		-25 °C up to +60 °C
<b>Relative humidity</b>		non condensing, max. 80 % for temperature < 31 °C, decreasing linearly to 50 % at 40 °C
<b>Ingress protection</b>		IP20
<b>Power supply (<math>\pm 10 \%</math>, 50/60 Hz)</b>		230 V
<b>Line protection, connection</b>		10 A, Schuko
<b>Housing</b>		plug-in unit, colour light grey (RAL 7035)
	Amplifier	19", 5 U
	approx. dimensions (HxWxD)	222 x 483 x 700 mm
	Power supply	included
	approx. dimensions (HxWxD)	-
<b>Weight</b>	Amplifier (approx.)	70 kg
	Power supply (approx.)	-


## OPTIONS AND ACCESSORIES

Options			
OPT.01	IEEE488	Not in combination with OPT.02	optional
OPT.02	RS232	Not in combination with OPT.01	optional
OPT.05	U/I monitor	Galvanically isolated voltage and current measurement outputs accessible via BNC sockets (includes OPT.14)	optional
NT.11.70S	Additional voltage range	Symmetrical DC voltage range (e.g. for magnetic field tests) U: 0 ... $\pm 70$ V ( <a href="#">see diagram</a> )	optional
OPT.14	External input	0 ... $U_{Ext\ max}$ $U_{Ext\ max}$ peak is adjustable between $\pm 2$ V ... $\pm 25$ V OPT.14 includes a digital low pass input filter Type Bessel or Butterworth, order 1 ... 6 (adjustable) Filter frequency selectable 100 Hz ... 10 MHz	optional
OPT.24	Programmable internal resistance	Programmable internal resistance R: 0 m $\Omega$ ... 500 m $\Omega$ / accuracy: $\pm 2$ m $\Omega$	optional
OPT.25	Constant current mode		optional
OPT.30	Optical link	Optical interface to real time simulator LC duplex interface / Aurora 8B/10B protocol / 2 Gb/s data rate	optional
OPD	Overvoltage protection device	Voltage suppression for DC voltage range: -15 V ... +20 V	not available
OPT.70	Disable sink mode of amplifier	Only in combination with option OPD	not available


## MAXIMUM ALLOWABLE OUTPUT VOLTAGE (NT.11.70S)

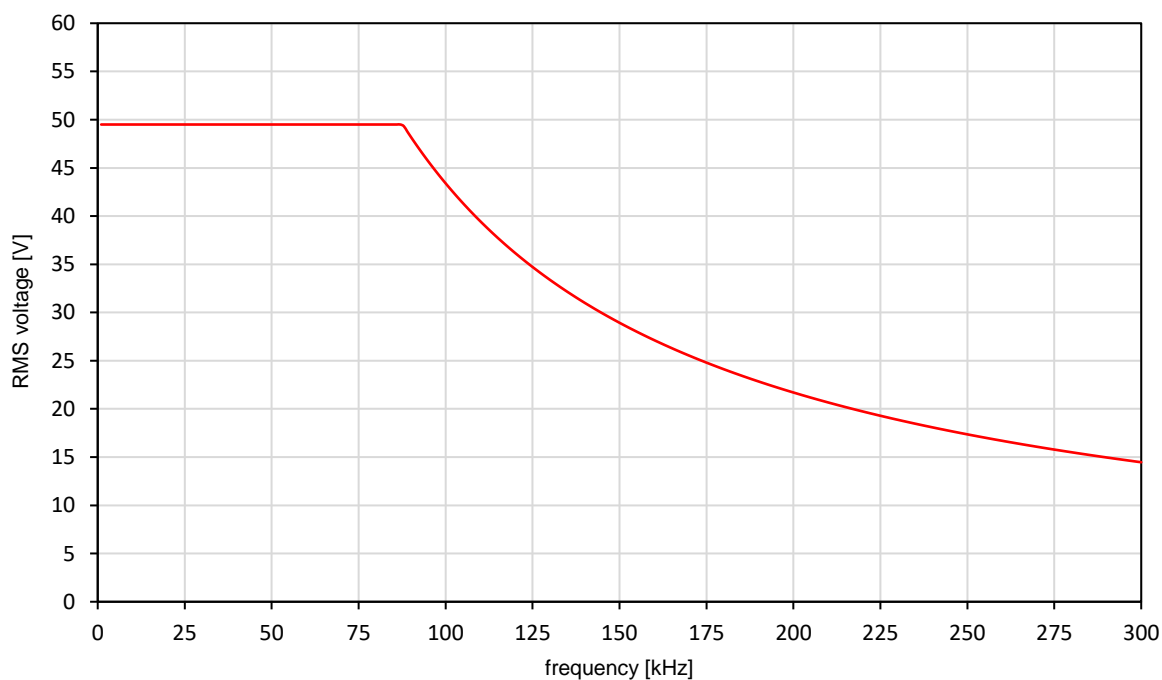


## OUTPUT CURRENT CAPABILITY<sup>1)</sup> - 20 V Range

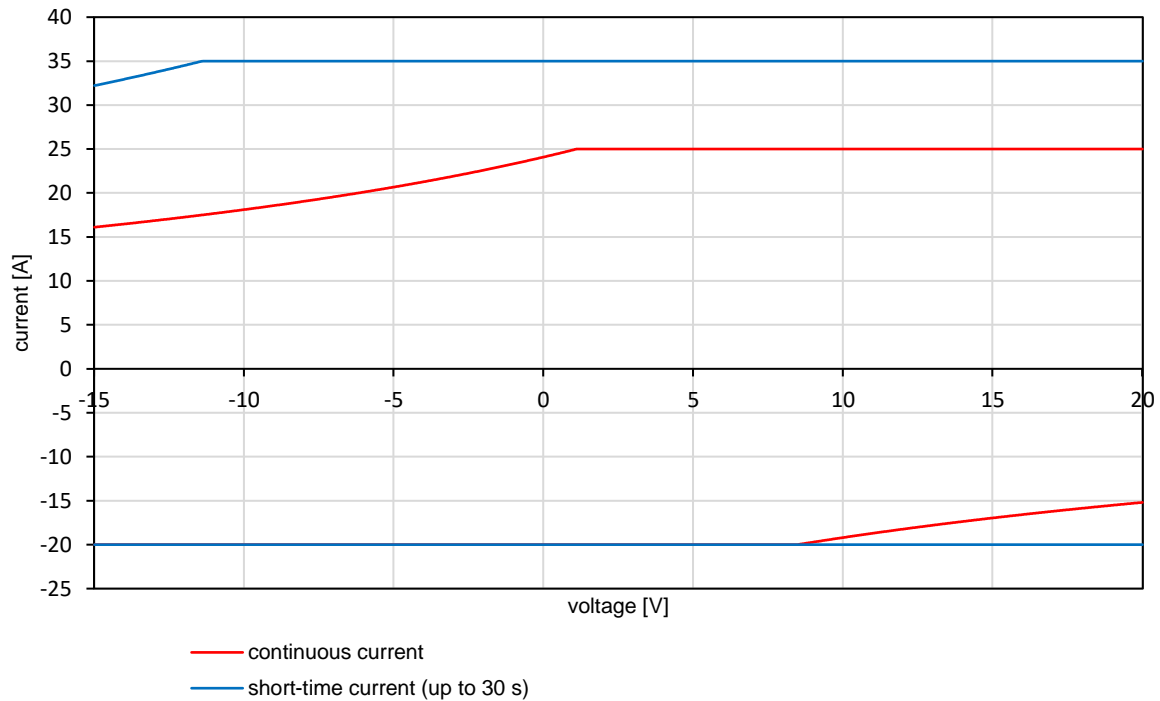


## OUTPUT CURRENT CAPABILITY<sup>1)</sup> - 36 V Range

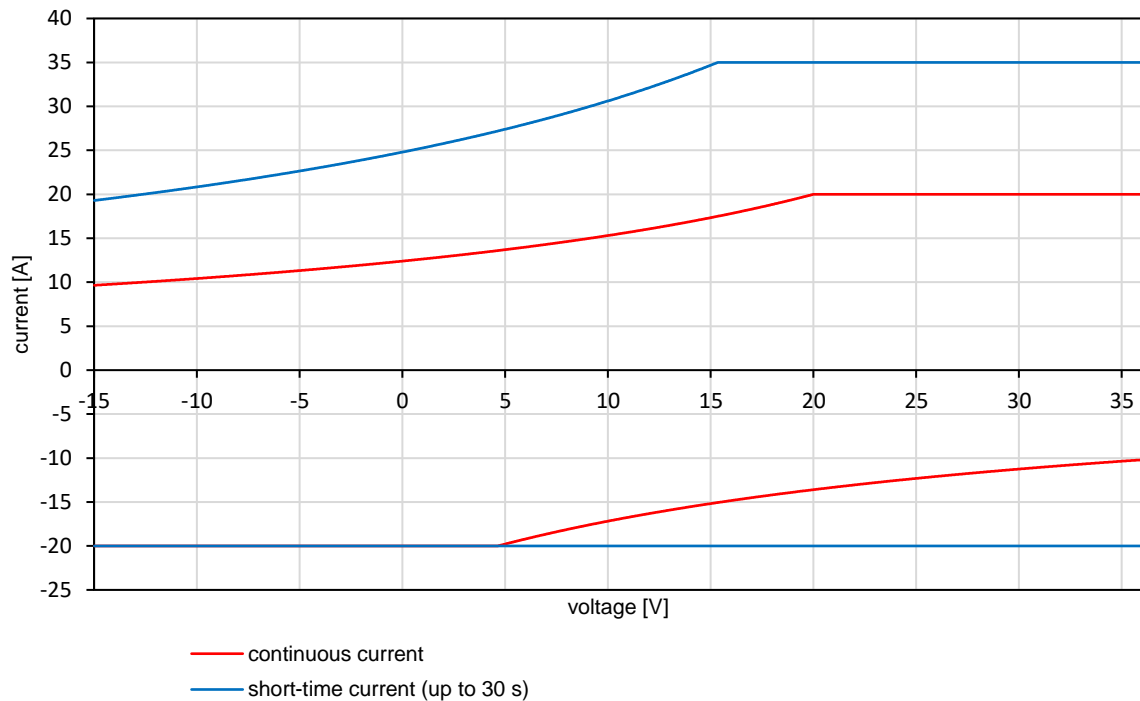

## OUTPUT CURRENT CAPABILITY<sup>1)</sup> - 54 V Range

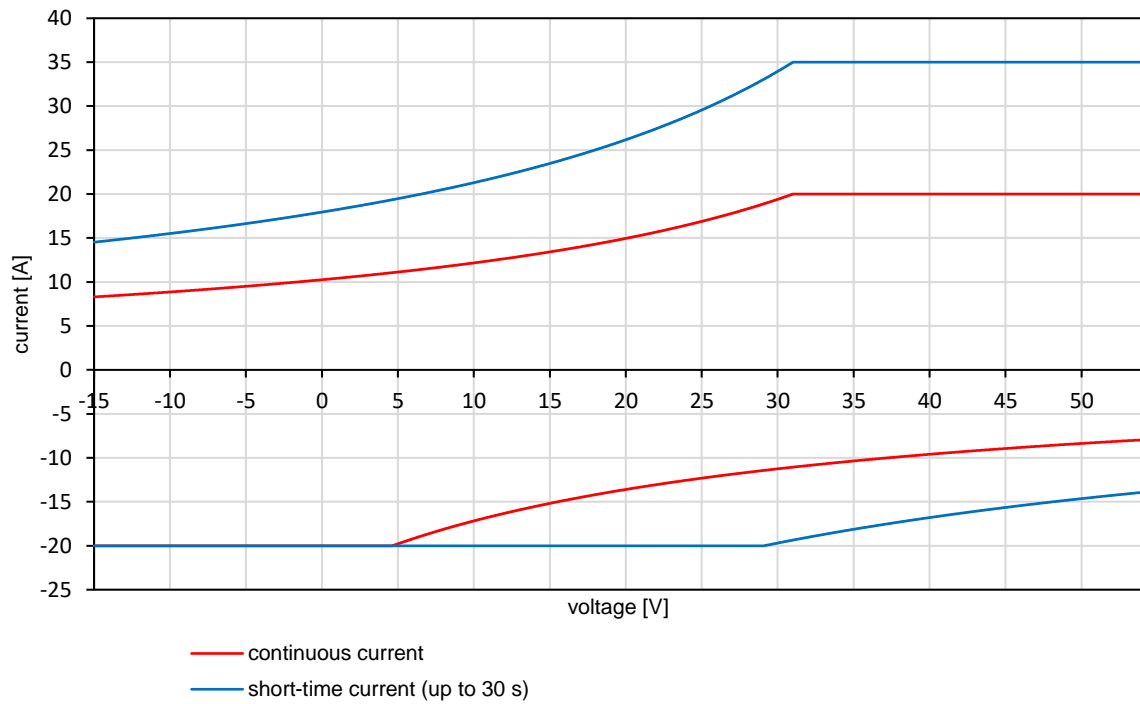

## OUTPUT CURRENT CAPABILITY<sup>1)</sup> - 70 V Range

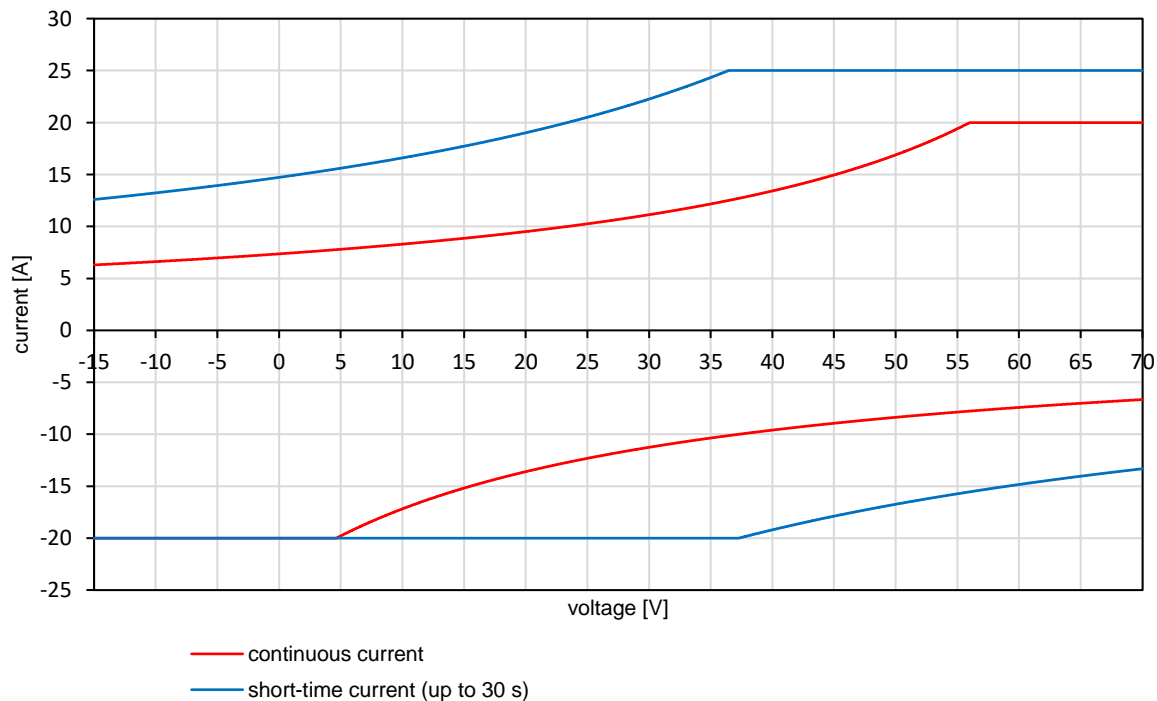

Remarks:

- 1) Diagrams refer to a supply voltage of 230 V and 23 °C ambient temperature